

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Weathering Indices for Assessment of Weathering Effect and Classification of Weathered Rocks: A Case Study from NE Turkey

Sener Ceryan

*Geology Engineering Department,
Balikesir University, Balikesir
Turkey*

1. Introduction

Weathering state and weatherability of rocks are highly important for engineering geology projects and the use of rocks as building. The state of weathering resulting physical and chemical processes may be reflected by changes in index properties such as dry density, void ratio, clay content and seismic velocity. Thus, it is important for geotechnical engineers to estimate weatherability of rocks, quantitatively the changes during weathering and classification of the weathered rocks. In this study, first these topics which are the classification of weathered rocks and the indices for definition of the effects of the weathering is discussed and then a case study from NE Turkey is given. The research reported here was carried out in a 40 km² area of Upper Cretaceous Eocene granitic rocks along the River Harsit around Dogankent (Giresun) in the North eastern part of Turkey (approximately 41° N, 39 °E). In the case study, the definition of mineralogical and chemical changes created by the weathering of the Harsit granitic rocks and the classification of weathered rock materials and masses from the granitic rocks were investigated

2. Weathering indices

Several weathering indices have been devised for quantifying the changes in the intrinsic properties of rocks from different points of view, some of which can be related to the engineering properties of weathered rocks (Tecer 1999, Gupta and Rao 2001, Tecer and Cerit 2002, Ceryan et al. 2005). The most commonly used methods can be broadly categorized as chemical, mineralogical-petrographical and engineering indices (Gupta and Rao 2001). Several mineralogical and micropetrographical parameters have been proposed as the basis for weathering indices in view of their variation with weathering (e.g. Lumb 1962, Weinert 1964, Mendes et al. 1966, Dixon 1969, Onodera et al. 1974, Irfan and Dearman 1978a, 1978b, Cole and Sandy 1980, Howarth and Rowlands 1987, Tugrul and Gurpinar 1997, Rigopoulos et al 2010). Chemical change during weathering and hydrothermal alteration are quantified in several ways including the normalized value of element (or oxide) using their parent rock concentrations or immobile element concentrations in the samples (Krauskopf 1967, Minarik

et al. 1983), standard cell calculation (Colman 1982), ratio of elements to immobile elements (Chesworth et al. 1981, Colman 1982, Guan et al. 2001), measurement and calculation of loss or gain of weight (or volume) based on immobile element (Gresens 1967, Grant 1986, MacLean 1990, Huston 1993), using cation packing index (Ceryan et al 2008c, Ceryan 2011), cation exchange capacity (Arikan et al. 2007), modeling of compositional change due to chemical weathering (Eynatten et al. 2003), using an EC/pH meter (Shalkowski et al. 2009) and chemical weathering indices (Vogel 1973, Jayawardena and Izawa, 1994a,1994b, Düzgören-Aydın et al. 2002, Düzgören-Aydın and Aydın 2003, Price and Veblen 2003, Bozkurtoglu et al 2006, Ohta and Arai 2007, Ceryan et al. 2008a, Yildiz et al 2010, Ceryan 2011). Chemical weathering indices have also been proposed by numerous authors. These indices were summarized in Duzgoren-Aydın et al. (2002).

According to Ceryan (2008), no single weathering index given in the literature meets the modeling of the process involved in chemical weathering outlined above, and no weathering index would give unequivocal results when applied to the prediction models to assess the mechanical behavior of rocks materials. Thus, a theoretical model was developed by Ceryan (2008). The said model depends on isovolumetric approach and take into consideration of the definition of Loughnan (1969). In order to explain the change of the volumetric concentration of major oxides across a weathering profile, the following steps were applied (Ceryan 2008).

- Modal analysis and whole rock analyses of the sample taken across a weathering profile are performed.
- The weight percentage of the major oxide under interest from whole rock analyses of fresh samples are multiplied by dry density of the respective sample. Then Amob value in Figure 1a is obtained. By means of this Amos value, a parallel line (OA) was drawn.
- For each sample weathered to various degrees, the weight percentage of the major oxide is multiplied by dry density. By this way, upon plotting of the dry density as a function of the volumetric concentration of the major oxide, the OB line in Figure 1a is obtained.
- By microprobe analysis of the fresh minerals, the major oxide composition of the minerals in the sample is determined.
- To calculate total amount of the major oxide in unaltered portion, the following equation (Banfield 1985) is applied.

$$W_{mo} = \left[\sum_{i=1}^n Mv(i) \times Ow(i) \right] \quad (1)$$

where W_{mo} is the weight percentage of the major oxide in weathered sample, i values represent minerals such as plagioclase ($i=1$), orthoclase ($i=2$), hornblende ($i=3$), biotite ($i=3$), pyroxene ($i=4$), quartz ($i=5$), opaque minerals ($i=6$), Mv is the volume percentage of minerals found by the modal analysis, Ow is the concentration (in weight percentage) of the major oxide in minerals from the microprobe analysis.

- The total amount of any major oxide from the equation 1 is multiplied by its dry density and then the volumetric concentration of the major oxide in the unaltered portion of the sample is found
- The volumetric concentration of the major oxide in the unaltered parts of the samples versus the dry density of the samples weathered to various degrees are drawn and then the OC line in Figure 1a is obtained.

Ca, Na, Mg, and K are geochemically mobile elements. Chemical leaching results in a significant decrease of the oxides of these elements. The ratio of the volumetric concentration of (CaO+MgO+Na₂O+K₂O) in a weathered sample to those in the fresh sample taken from the same weathering profile gives the amount of leaching for the weathered sample. Therefore, this ratio given at the Equation 2 is defined as the *Chemical Leaching Index* (CLI) (Ceryan 2008). Al, Fe, and Ti are less affected by chemical leaching than alkali and alkali-earth elements, but tend to concentrate in weathering products (Loughnan 1969). If the drainage is well-developed, Si moves away, if not, it also tends to concentrate in the weathering products. The ratio of the total amount of these oxides in weathering product to those in the respective sample yields the amount of weathering products. Therefore, the *chemical weathering product index* (CWPI) is defined through the Equation 3 (Ceryan 2008).

$$CLI = \frac{100(A_{mob} - B_{mob})}{A_{mob}} \quad (2)$$

$$CWPI = \frac{100(B_{immob} - C_{immob})}{B_{immob}} \quad (3)$$

where A_{mob} and B_{mob} are the total volumetric concentration of mobile oxides in fresh sample and weathered sample, respectively. B_{immob} and C_{immob} are the total volumetric concentration of immobile oxides in the whole sample and unaltered portion of the sample, respectively. If y axis in the Figure 1a represents the volumetric concentration of the mobile elements, likewise CLI can be found for the weathered sample. If y axis in the Figure 1b represents the volumetric concentration of immobile elements, CWPI can be found for the weathered sample as defined above. Considering the definition of Loughman (1969), *Total Chemical Weathering Index* can be defined as the sum of CWPI and CLI. Since the rock material can be weathered 100% at most, TCWI value should be also at most 100. Therefore, (CWPI+CLI) value has been divided by 2 in order to get TCWI given by the following equation (Ceryan 2008).

$$TCWI = \frac{(CWPI + CLI)}{2} \quad (4)$$

According to Olier (1984), the weatherability of a rock depends on the number of cation replaceable with hydrogen in a mineral. When considering this definition of the k-value, it is possible to say that the k-value can be used for characterizing the weathering state and weatherability of a rock (Ceryan et al 2008b, 2008c). In addition;

- By using the k-value, the amount of the removed minerals by chemical leaching can be estimated,
- The amount of weathering products can be found by the k-value,
- The petro-physical properties of a rock can be expressed depending on weathering degree by k-value,
- Although the chemical weathering indices are calculated by results of the chemical analyses, the k-value is obtained from modal analyses (Ceryan et al 2008c)

The cation distribution is defined by the "Cation Packing Index", k-value, for each (stoichiometric) mineral phase. k-value (mole/cm³) is described as follows:

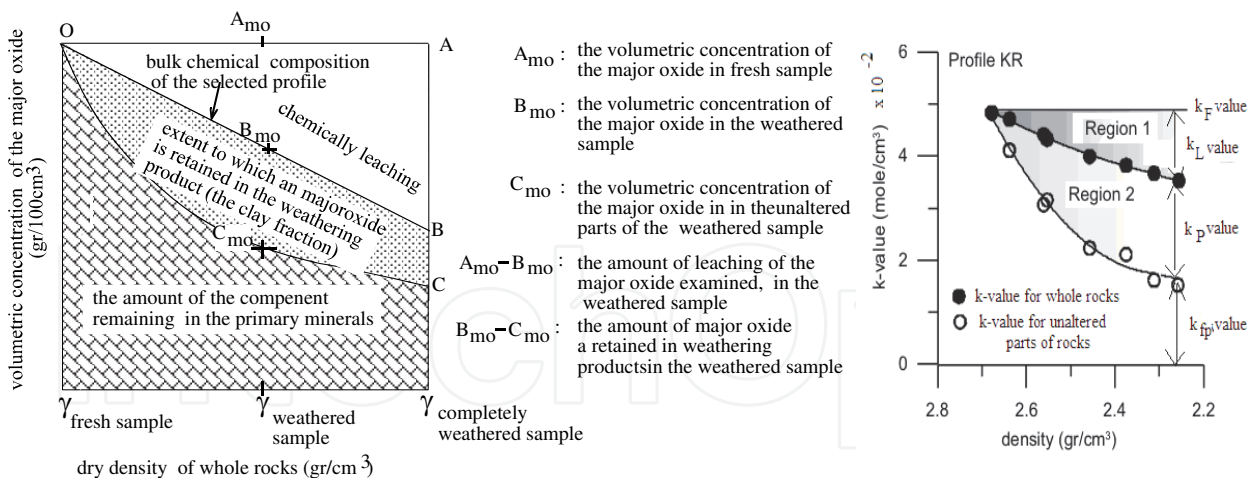


Fig. 1. A hypothetical model illustrating the behavior of major oxides during chemical weathering (modified Banfield 1985) (a), the graphs showing the relationships between the density and the cation packing index, (k-value (Ceryan 2011) (b).

$$k = \frac{C}{N_L V_M} \tag{5}$$

where C is number of cations per mole, N_L is Avogadro's number and V_M is molar volume. For a certain rock, k-value can be calculated by using the following expression:

$$k = \sum x_i k_i \tag{6}$$

where k_i is the k value of the i mineral phase, x_i is is mod of the mineral in the rock determined by modal analysis of thin sections

Ceryan (2011) said that as decomposition of a mineral result in the formation of new minerals with lower k-value, the k-value of whole rocks is generally regarded as a measure of the degree of weathering (Table 1), therefore, it is possible to say that the k-value can be used for characterizing the weathering state and weatherability of a rock.

The region 1 on Figure 1b represents the chemical leaching ratio while the region 2 on Figure 1b gives the weathering product ratio. In the Figure 1b, k_F is cation packing index (k-value) of fresh sample, k_L is the amount of chemical leaching, k_P is k-value of weathered parts of samples (weathering products) and k_{fp} is k-value of unaltered parts of the samples (Ceryan 2011). The difference between the k-value of fresh sample (k_F) and the k-value (k_W) of weathered sample gives the amount of chemical leaching (k_L, Figure 1b). The ratio of the difference to k-value of the fresh sample taken from the same weathering profile is defined as k- leaching index (k^{*}_L). On the other hand The difference between the k-value of the whole sample and the k-value of the unaltered parts of the same samples (k_{fp}) gives the amount of weathering product. Therefore the ratio of the difference to k-value of the same sample is defined as k-product index (k^{*}_P) (Ceryan 2011);

$$k^*_L = \frac{k_L}{k_F} \tag{7}$$

$$k^*_P = \frac{k_P}{k_{fp}} \tag{8}$$

Minerals		PrI	Wm	Ks	k-value (10 ⁻² mole/cm ³)	V _p (m/n)
Olivine	<i>Fayalite</i>	0.057	138.36	3.385	6.85	8400
	<i>Forsterite</i>	0.709	46.132	1.813	6.80	
Pyroxene	<i>Diopside</i>	0.362	24.434	1.829	6.05	7330-7200
	<i>Enstatite</i>	0.515	22.646	1.6431	6.37	
Amphibole	<i>Tremolite</i>	0.425	4.2954	1.004	5.54	6800
	<i>Hornblende</i>	0.849	2.8744	0.5296	5.309	
	<i>Labradorite</i>	0.389	0.542	0.144		
Plagioclase	<i>Andesine</i>	0.479	0.5875	0.088	4.99-4.97	7250-6250
	<i>Oligoclase</i>	0.529	0.5916	0.048		
Alkali - Feldspar	<i>Orthoclase</i>	0.719	0.7178	-0.0007	4.577	5800
Quartz		-	-		4.41	6050
Mica	<i>Muscovite</i>	-	-	-	4.98	5880
	<i>Biotite</i>	1.1613 *	4.3741*	0.5791	4,656	5360
Vermiculite		0.4439*	1.8176*	1.8176	3.95*	-
Chlorite (coronsite)		0.4996*	1.6406*	1.6406	4.10	5000
Clay	<i>Sericite</i>	0.5547	0.2133	-0.4151	4.52	2400-1800
	<i>Illite</i>	0.1725	0.1907	0.0435	4.099	
	<i>Smectite</i>	0.1044	0.1226	0.0697	3.997	
	<i>Kaolinite</i>	0.0462	0.0429	-0.0325	4.058	

Table 1. The chemical weathering indices values, k-value and P-wave velocity of selected rock-forming minerals and their weathering products (from Ceryan et al 2008b, 2008c)

From a geotechnical standpoint, indices based on key engineering properties generally have more applicability than those based on chemistry and mineralogy and are also usually more simple and less time consuming (Gupta and Rao 2001). Martin (1986) pointed out that in principle a simple quantitative degree of weathering scale can be established based on a reliable index of any rock property which changes unidirectionally throughout the weathering process and whose value can be readily determined at any weathering stage. A simple and rapid test to obtain a quick absorption index (QAI) or void index has been proposed by Hamrol (1961) for the assessment of weathering of granite and schist. Water absorption by weight were used to determine weathering degree of marble by for marble Gulec (1973) and create weathering classification of rock materials by Kılıc (1995). Lee (1987) and Ceryan (1999) used it for predicting of mechanical properties of weathered granitic rocks. A different type of measure, the abrasion resistance hardness index (Ha), was devised by Conca and Cubba (1986) to study the abrasion hardness and extent of weathering in different rocks - sandstone, gabbro, tonalite and crystalline limestone (from Gupta and Rao 2001).

The slake durability index (Sd) was devised by Franklin and Chandra (1972) to assess the durability or weatherability of clastic sedimentary rocks such as mudstone, claystone and

shale, particularly useful for rocks with significant clay content (Moon and Beattie 1995, Gokceoglu 1997, Koncagul and Santi 1999, Gokceoglu et al. 2000, Sadisun et al. 2005), but there are some limitations and weaknesses associated with this method (Erguler and Ulusay 2009). The other weathering indices are dry density (e.g. Banfield 1985, Turk and Dearman 1985, Eggleton et al. 1987, İrfan 1996, Ceryan 2008, Ceryan 2011), Schmidt hammer rebound value (e.g. İrfan and Dearman 1978a, Martin and Hencher 1982, İrfan and Powell 1985, Lee 1987, Guolin and Yushan 1990, Zhao et al. 1993, GCO 1994, Gokceoglu 1997, Ceryan et al. 2008a, Basu et al. 2009), the elastic wave velocity (e.g. İllev 1967, Kılıc 1995, 1999, Dearman and İrfan 1978, Krank and Watters 1983, Turk and Dearman 1985, Lee 1987, Dearman et al. 1987, Dobereiner et al. 1993, Weiss et al. 2002, Ceryan and Sen 2003, Kocbay 2003, Gurocak and Kilic 2005, Arikan et al. 2007, Ceryan et al. 2008a, 2008b, Basu et al. 2009, Korkmaz and Ceryan 2011), porosity, effective porosity and void ratio (e.g. Ondera et al. 1974, İrfan and Dearman 1978b, Türk ve Dearman 1985, Paşamehmetoğlu et al. 1981, Lumb 1983, Lee, 1987, Esaki and Jiang 1999, Gupta and Rao 2001, Ceryan et al. 2008a, Gokceoglu et al. 2009, Rigopoulos et al. 2010, Marques et al. 2010). Ceryan et al (2008a) suggested new index base on porosity (n) and effective porosity (n_e).

$$I_{efp} = \frac{n_e - n}{n} \times 100 \quad (9)$$

Ceryan et al (2008b) suggested two new indices representing mineralogical and physical changes due to weathering. These indices, Mineralogical Change Parameter (Imp) and Physical Change Parameter (Ifp) were given following equations:

$$Imp = \frac{100(V_{pf}^* - V_{pw}^*)}{V_{pf}^*} \quad (10)$$

$$Ifp = \frac{100(V_p^* - V_p)}{V_p^*} \quad (11)$$

where Ifp is the Physical Change Parameter, V_p is P-wave velocity of the investigated dry sample and V_p^* is P wave velocity of the same samples which would have lacked pores and fissures (Foumaintraux 1976), w refers to weathered rocks, while f refers to fresh rocks. If the mineral composition of the samples is known, V_p^* can be calculated by employing the Equation 37 (Foumaintraux 1976).

$$\frac{1}{V_p^*} = \sum_{i=1}^n \frac{x_i}{V_{pi}} \quad (12)$$

Where x_i is mod of the mineral in the rock and V_{pi} is P-wave velocity in the mineral constituent (i).

Aydın and Basu (2006) said that microstructural weakening accompanying this process is expected to be dramatic, especially in terms of tensile strength during the early stages of weathering and the behavior of rocks in tension may therefore be an effective indicator of their microstructure, and hence state of weathering. Considering the difficulty the applicability of the index properties indicates obtained from their study, Gupta and Rao

(2001) suggested a new engineering index, strength ratio (Rs), based on unconfined compressive strength. This is expressed as

$$Rs = \sigma_{CA} / \sigma_{CFF} \times 100$$

(13)

where; Rs is the strength ratio (%), σ_{CA} is the uniaxial compressive strength of altered rock,(MPa) and σ_{CFF} is the uniaxial compressive strength of fresh rock (MPa).

3. Classification of weathered rocks for engineering purpose

Although descriptions and classifications are related, their purpose is fundamentally different, the description of a rock being a record of what is present and the classification; of the rock being an assessment of its character in a form which permits a comparison to be made with other rocks of similar character. A classification is derived from descriptions whereas descriptions cannot be derived from a classifications (Lee 1987, Anon 1995, Ceryan 1999). Description and classification of weathered rocks are necessary to obtain the changes of its engineering properties. The first step in classification is to determine the parameters of rocks related to classification purpose and to define the rock according to these parameters and properties (Lee 1987, Anon 1995, Ceryan 1999). Defining the weathered rocks for the purpose of engineering goals is make sense to determine the degree of weathering effect, extend and characteristics in detail at that momen (Lee 1987, Anon 1995, Ceryan 1999). There are the disadvantages in using the classifications proposed for weathered rock (Table 2). Nevertheless, there are several good reasons for employing such classifications for certain rock types, particularly at higher degrees of weathering (Anon, 1995);

Disadvantages		Advantages	
a.	The possibility of finding rock mass properties not included in standard weathering scales in the field limits the use of these classifications.	a.	Without an appreciation of the degree of weathering as a process a far poorer understanding of the engineering performance would result.
b.	It is known that the classifications widely used are not handled identically and they are differently applied to all people in varying forms, and this shows that the said circumstance is treated bound to the thickness of weathering profile in that area and the knowledge and experience of the applicants.	b.	Grades will often provide a framework within which test results can be interpreted and linked to engineering performance.
c.	Classification includes interpretation and simplification, hence this constitutes missings in original data and descriptions.	c.	Because extremely weathered rocks are often sensitive to disturbance during sampling and testing, good quality geotechnical test data can be difficult to obtain. The framework of understanding provided by a workable classification based on index properties can ensure the optimum use of the available information.

Table 2. Disadvantages and advantages in using the classifications of weathered rocks (Anon 1995)

In the literature, there are different classifications systems for weathered rocks. These systems, qualitative classification of weathered rocks, are mainly based on the visual

definition of the geological properties, the index properties and the basic mechanical test that can be applied also in the field. The common properties used for classification of weathered rock materials are presence of original texture, degree of discolouration of rock, degree of chemical decomposition of biotite and feldspar, degree of physical disintegration, disintegration of material in water, relative rock material strength, breakability of NX core in the hand, friability, relative hardness by hammer blow, Schmidt hammer value, method of hand excavation, degree of plucking of individual grains, degree of penetration of geological pick or knife, hand penetrometer, tests (Dearman 1976, BSI 1981,Martin and Hencer 1986, Lee 1987, GCO 1994, Anon, 1995, Ceryan 1999, Ceryan et al 2008b). The common rock mass properties used in the weathered rocks classification system are rock mass: degree of discolorations along joint plane, presence of original structure, rock to soil ratio, degree of weathering along joint plane, angularity of corestone, opening of joint, NX core recovery, relative rock mass permeability, RQD (BSI 1981;Martin and Hencer 1986, Lee 1987, GCO 1994, Anon 1995, Ceryan 1999, Ceryan et al 2008b). In the present, the the most widely used weathering classification system among quantitative classification system in the literature were suggested by Anon (1995). Price (1993) suggested a ratings (quantitative) system for the description of rock mass weathering. Ratings for rock materials and ratings for discontinuity are mainly parameter used in the said system (Table 3). The system is based on visual impression. However, an approach which seems to be successful for many engineering applications is the use of a rating system to place a rock mass within a classification. In Figure 2, the rating system in graphical form and comparison of the rating system with the qualitative system suggested by Anon (19995). Akgun and Ceryan (2010) obtained that meaningful relationship between the rock mass strength properties and the weathering rating (Rw). (Eqs 13-16) And they said that Geological Strength Index (GSI) value and shear strenth of rock mass decrease with the weathering rating (Figure 3)

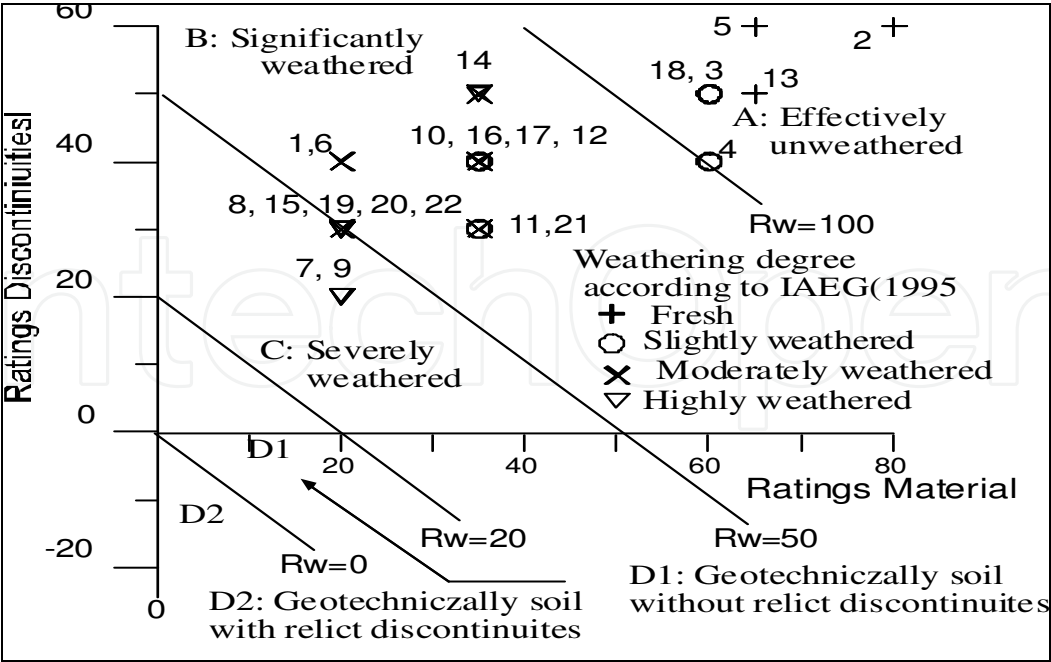


Fig. 2. The rating system in graphical form and showing the weathering degree of the geotechnical units selected from volcanic rocks from Giresun-Gumushane road, NE Turkey Number is representing geotecnical unit name (Akgun and Ceryan 2010).

Prp	Fresh	Discolored (some loss of strength)	Friable (and discolored) (considerable loss of strength, geotechnically an engineering soil, $\sigma_{ci}<1.25$ Mpa)
4/4	40	0	0
3 / 4	30	5	5
2 / 4	20	10	10
1 / 4	10	15	15
0	0	20	20

Igneous rocks-joint only

All discontinuities
in all type of rocks

Prp	Unweathered	Surface stained	Rock material weathered to depth> joint waviness	Proportion of discoti- nuities present as relict in geotechnical soil
4 / 4	20	0	0	-20
3 / 4	15	5	5	-15
2 / 4	10	10	10	-10
1 / 4	5	15	15	-5
0	0	20	20	0

Sedimentary and metamorphic rocks (including limestone)- Ratings for joint and bedding
or foliation planes

Prp	Unweathered	Surface staining or modified by solution	Rock material weathered to depth> joint waviness or open by solution
4 / 4	20	0	0
3 / 4	15	5	5
2 / 4	10	10	10
1 / 4	5	15	15
0	0	20	20

Table 3. Rating for all rocks materials and joint and relict discontinuities in all rocks (Price, 1993; Prp: Proportion)

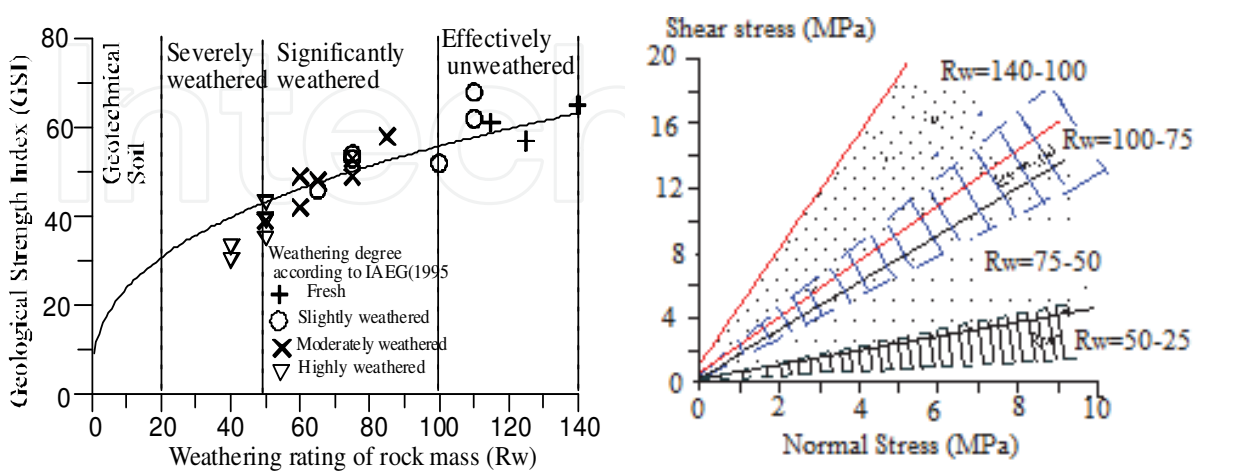


Fig. 3. Changing of the GSI and shear strength of the geotechnical units by weathering condition for volcanic rocks exposed Giresun-Gumushanr roads, NE Turkey (Akgun and Ceryan 2010).

$$GSI = 4.32Rw^{0.564} \quad (r=0.930) \quad (14)$$

$$\sigma_{cm} = 5.76Rw^{2.975} \quad (r=0.945) \text{ and } \sigma_{tm} = -7.35Rw^{3.11} \quad (r=0.923) \quad (15)$$

$$E_m = 5.09Rw^{1.60} \quad (r=0.938) \quad (16)$$

$$c'_m = 6.54Rw^{1.982} 10^{-5} \quad (r=0.943) \text{ and } \phi'_m = 6.54Rw^{1.982} \quad (r=0.928) \quad (17)$$

Where σ_{cm} is uniaxial compressive strength of rock mass (MPa), σ_{tm} is tensile strength of rock mass (MPa), E_m is the deformation modulus of rock mass (MPa), c' and ϕ' are cohesion (MPa) and frictional angle (degree) rock mass,

The quantitative weathering systems are the second one in creating the classification systems of the weathered rock materials. The approaches used for the creation of the quantitative weathering classifications are handled within 4 groups (Ceryan et al 2008b). First approach is that the weathering grades are defined numerically according to the only one index property (Hamrol 1961, Onodera et al. 1974, Zhao and Broms 1993, Gokceoglu and Aksoy 2000). However, weathering may not be expressed by the change in one index property used in the classification. For example, measured crack density and dry density from different locations in a granitic batholith may vary depending on its heterogeneity. Moreover, crack density varies depending on the tectonic activity on the location of the sample and the technique used when preparing a thin-section. Furthermore, using only one index property does not give enough information about all the weathering processes. In the second approach, the change amount of an index property measured on weathered sample to the value measured in the fresh sample is taken essentially. In this approach, the qualitative definition of the weathering grade has been shown in the following equation.

$$WD = \frac{100(Z_{fresh} - Z_{weathered})}{Z_{fresh}} \quad (18)$$

where, WD is weathered degree of the sample, Z_{fresh} is the measured value of the fresh rock property basically used. $Z_{weathered}$ is the value of the measured weathered rock property. Weathering classifications using elastic wave velocity (Illiev 1967), water absorption (Gulec 1973) and unconfined compressive strength (Gupta and Rao 2001) are some examples for this approach. The third approach is the use of empirical formulae which are commonly used in obtaining the quantitative weathering scales. In these formulae, two or more properties are used. The approaches proposed by Guolin and Yushan (1990), Kılıç (1995, 1999), Kocbay (2003) and Lan and et al. (2003) can be given as examples. The last one proposing quantitative weathering scale uses the statistical analyses such as hierarchical cluster analysis (Wei and Lui 1990) and multiple regression and factor analysis (e.g. Arikan et al. 2007).

The changes caused by weathering processes in rock material may be mainly considered under the two topics; first is the mineralogical change (and directly chemical change) and second is the physical change. Each of these changes can be defined separately and measured (Ceryan et al 2008b). The width of micro-cracks (Onodera et al. 1974), crack density (Dixon 1969, Davis 1984), micro-fracture index (Irfan and Dearman 1978a, Al-Qudami et al. 1997) and linear crack density (Sousa et al. 2006) were used order to measure

the physical change occurred by the weathering in rock material (from Ceryan et al 2008b). To define the mineralogical and chemical changes numerically due to weathering, it is possible to find various methods in the literature including chemical weathering indices and petrographical indices given above (from Ceryan et al 2008b). If we are able to measure the mineralogical and physical changes separately in the weathered rock material, we can show each of these changes in the distant axis in the Cartesian coordinate system (in the continual axis set that the other one admitted) (from Ceryan et al 2008b). Fig 4a, the definition of weathering degree based on mineralogical change and the physical change shown in thin section image. In Fig. 4b from Al-Qudami et al. 1997, the mineralogical change was defined by the secondary mineral content and the physical change was described by micro fissuring index. As a consequence of the demonstration of the physical and mineralogical changes in this way (on the different axes in the Cartesian coordinate system), the weathering state can be defined as the distance from the origin (from Ceryan et al 2008b).

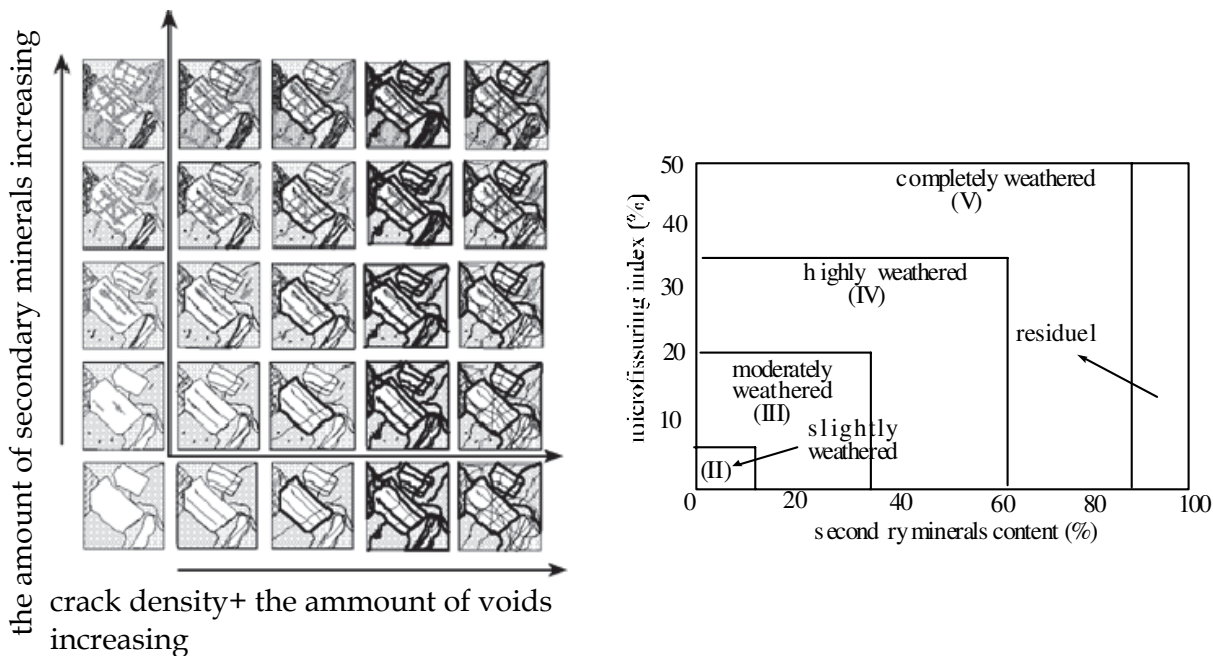


Fig. 4. The definition of weathering degree based on mineralogical change and the physical change caused by weathering processes(a) and the secondary mineral content and micro-fissuring index

Ceryan et al. (2008b) said that If Imp and Ifp are shown on the distance axis in the cartesian coordinate system, the distance from the origin will show the weathering condition of the sample. Therefore, "Weathering State Parameter ", Iad , showing the weathering condition has been defined by the following equation (Ceryan et al 2008b).

$$Iad = \sqrt{\frac{Ifp^2 + Imp^2}{2}} \tag{19}$$

Iad together with slake-durability index value (Id), an indicator of the rock to soil ratio in the weathered rock material (Lee and Freitas 1988), should be considered in order to be able to define the weathering grades completely and significantly. As a result of this approach,

“Quantitative Weathering Index (I_a)” can be formulated following formula (Ceryan et al 2008b),

$$I_a = 100 - ((100 - I_{ad}) * I_d * 0.01) \quad (20)$$

Advantageous of the numerical weathering index proposed by Ceryan et al (2008b) were given as follows;

- During the P-wave velocity tests, the samples are not disturbed and hence, the test can produce many results using one sample.
- Descriptions of mineralogical and physical changes separately allow to make a comparison between two. By using this comparison, it is possible to assess the weathering process.
- It is possible to construct some correlations between the numerical weathering index and the engineering properties of rocks. By using these correlations, the engineering properties of the weathered rock material can be predicted easily and reliably.
- It is possible to classify the weathering degrees of igneous rocks by using the numerical weathering index and the weathering classes provide important informations about engineering behaviour of igneous rocks.
- When determining the weathering degree of pyroclastic rocks such as tuff by using the numerical weathering index, the homogeneity of the rock to be employed should be checked, because the P-wave velocity shows a high variety depending on heterogeneity.
- It is evident that if the pre-existing voids and/or the voids created by weathering are oriented, V_p and mechanical properties also change depending on measurement orientation. To cope with this difficulty, the minimum V_p value can be used as stated by Weiss et al. (2002).
- The numerical weathering index should not be applied on the rocks showing the soluble type weathering.

4. A case study: Weathering and weatherability of Harsit granitic rock

4.1 Weathering of Harsit granitic rock

In the study area, the basement rocks are basalts, andesites and pyroclastic units (Figure 5). The Harsit granitoid was intruded in the Upper Cretaceous/Eocene period Towards the periphery of the pluton, it consists of leucocratic quartz diorite, quartz monzonite and quartz monzodiorite while towards the centre the rocks are granodiorite. Towards the NW and SE the granites are terminated by NE-SW faults (Ceryan 2008a). During these processes some elements are released and combine with other minerals to form new minerals, e.g., the development of smectite from plagioclase is a consequence of the addition of Ca, Na and Fe while the subsequent removal of these changes the clay mineral to kaolinite (Figure 6). Orthoclase minerals are more resistance to weathering than plagioclase and holes on their surfaces indicated acid attack at an early stage of the weathering (Figure 6).

Hydrothermal weathering products are sericite and allunite. The weathering of the minerals in the Harsit granitic rocks. The weathering and hydrothermal alteration of the minerals in the Harsit granitic rocks and the type of change which occurs are indicated in Figure 7. Chemical weathering causes variation in the composition of the rocks by leaching and the introduction/ development of new components. SiO_2 concentrations show a continuous decrease with increasing weathering. Some of the free silicon ions released during weathering are transported in solution but some combine to form new clay minerals. Al_2O_3 ,

because of its low solubility, tends to be concentrated in residual weathering products. CaO and Na₂O, being soluble, either quickly move out of the system or combine with epidote and hornblende ± plagioclase. MgO is rapidly leached and removed in the early stage of chemical weathering, although a certain proportion is retained in the mineral structures of clays and chlorite. FeO remains relatively constant, although it may change from ferric to ferrous.

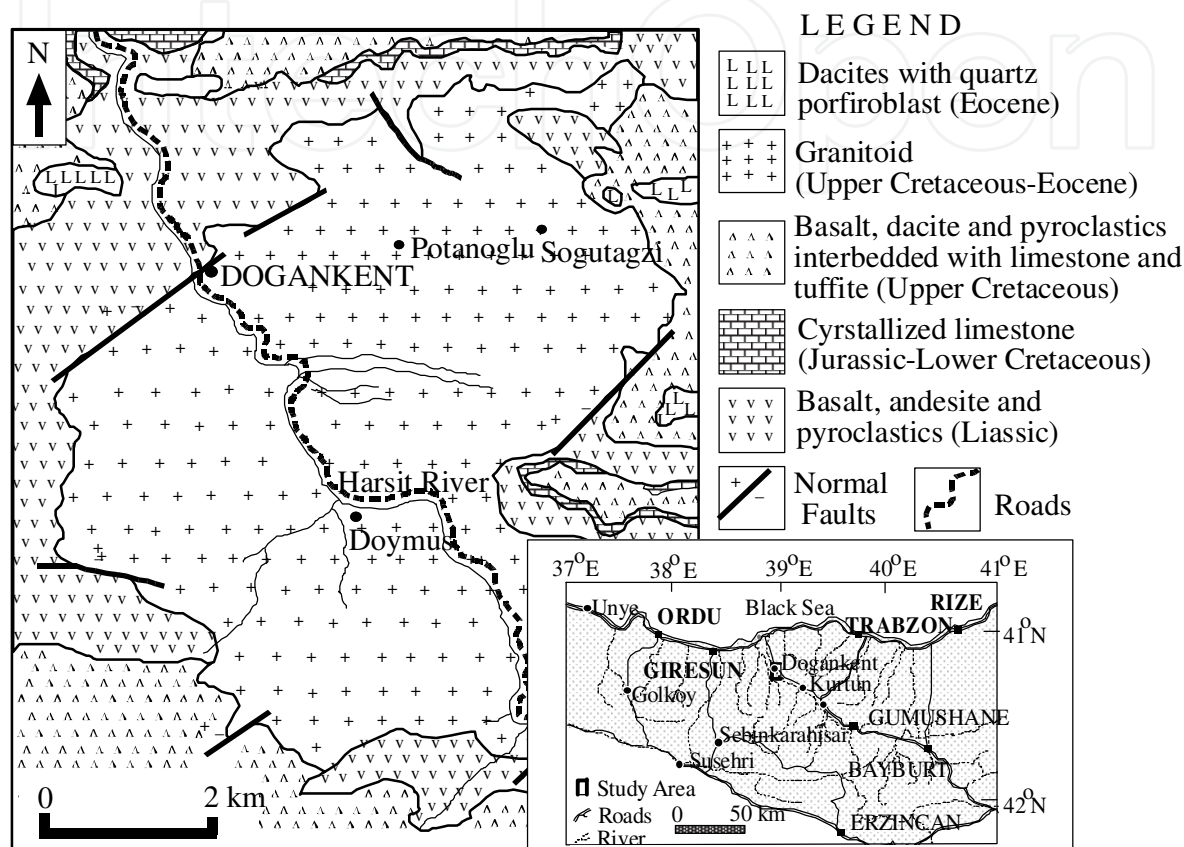


Fig. 5. Geological map of the study area

4.2 Weatheability of Harsit granitic rocks

Durability, i.e., the rock's ability to resist degradation during its working life, is depended on a number of important parameters; weatherability of rock material, degree of imposed during winning, production, placing and service, the climatic, topographic and hydrological environments in service (Fookes et al 1988). In the studies, which give assessment of durability of Harsit granitic rocks, performed Ceryan and Ceryan (2005) and Ceryan et al (2008), rock durability indicators, Static Rock Durability Indicator and Dynamic Durability Indicator purposed by Fookes et. al (1988) were used. Index properties, petrographic and chemical weathering indices and rock durability indices of rock materials from Harsit granitic rocks used these study were given in Table 4.

During chemical weathering; both chemical leaching of mobile elements (oxides) and forming weathering product occur on the rock materials. Thus, for the prediction of the engineering performance of the stone in service, Chemical Weathering Index and Chemical Leaching Index were used together in the study performed Ceryan and Ceryan. (2005). Simple and multiple regression analyses using chemical indexes, setting in this study, of the

sample from the weathering profiles samples of the Harşit granitic rocks show that the rock durability indexes purposed by Fookse et al. (1988) can be obtained easily and cheaply. In the study performed by Ceryan et al (2008), an application of fuzzy modeling to the prediction of potential rock durability indexes from rock sample taken from Harşit Granitoid was given. Depending on cation packing index and micro-cracks plus voids ratio, important changes in Static Rock Durability Indicator (RDIs) were determined. However, weatherability of the building stone depends on both mineralogical properties and fabric. Therefore, cation packing index representing mineralogical and micro-cracks plus voids ratio representing fabric properties are considered together in the fuzzy model to estimate the durability of the sample from Harsit granitic rocks. In the fuzzy model described input-output relationships by fuzzy if-then rules, Cation Packing Index and micro-cracks plus voids ratio used such as input data. The fuzzy model constructed in this study exhibited higher performance and showed good generalization ability (Ceryan et al 2008)

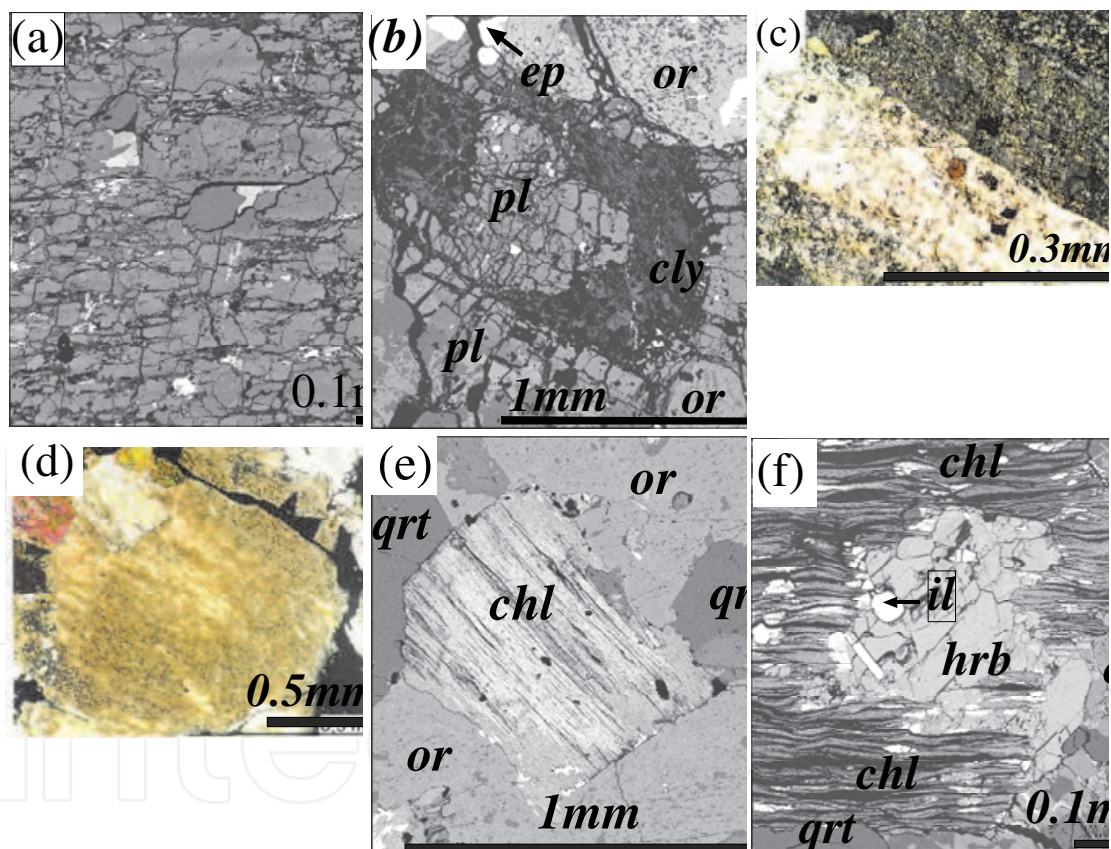


Fig. 6. Weathering products of plagioclase (a,b,c); clay minerals (dark phases)(a, b), epidote (bright phases)(a,b,c), the etching caused by the acid effect in orthoclase (b) the clays occurred by the weathering of orthoclase (d), chlorite occurrence due to the hydrothermal alteration of the biotite(e), weathering products of hornblende, chlorite (fibrous phase) and titanite (bright phases)(f). (a,b,e and f are scanning electron microscope images, c and d are optical microscope image; qrt: quartz; pl: plagioclase; or: orthoclase; ep: epidote; chl: chlorite; cly: clay ; bi: biotite, il: ilmenite; hrb: hornblende)

Sample	WG	Ip	SGssd	WA	Is(50)	SST	RDIs	CD (%)	k-value	CLI	CWPI
C-1A	F	8,158	2,706	0,4	6,65	0,3	2,37	0,25	4,621	0	0
C-23A	SW	2,882	2,698	0,5	3,59	8,7	0,92	1,84	4,449	21	23,92
C-3B	MD	1,521	2,63	1,2	0,785	34,6	-1,25	7,25	4,177	31,6	33,31
D-1A	F	28,387	2,68	0,4	6,865	0,3	2,48	0,16	4,682	0	0
D-1B	SW	3,129	2,674	0,5	3,915	5,8	1,15	0,18	4,61	-	-
D-2AB	SW	1,864	2,648	0,9	3,275	9,2	0,72	3,15	4,395	18,3	23,58
D-56	MW	1,159	2,615	1,4	0,725	42,6	-1,62	4,26	4,308	37,4	44,42
P-1A	F	7,149	2,719	0,6	7,845	0,2	2,77			0	
P-2A	F	5,502	2,705	0,5	5,935	0,3	2,09	1,17	4,654	0,69	9,397
P-2BC	MW	1,751	2,652	1,4	1,32	14,6	-0,32	3,85	4,417	-	-
P-3A	HW	1,18	2,629	1,5	0,305	43,1	-1,81	9,21	4,051	29	47,62
P-3B	HW	0,852	2,575	1,6		38,6				43,8	65,91
P-4	HW	1,089	2,605	1,3	0,28	45,6	-1,89	5,65	4,006	33	52,12
S-1A	F	14,198	2,693	0,5	6,58	0,5	2,33	0,61	4,728	3,79	0
S-3B	F	6,376	2,666	0,8	6,51	0,4	2,28	0,68	4,648	0	11,18
S-4A	SW	3,514	2,667	0,8	4,07	12,6	0,9	1,25	4,579	15,4	20,03
S-2A	MW	1,494	2,632	1,3	1,265	34,6	-1,08	3,42	4,427	26,2	34,74
S-3C	MW	1,697	2,628	1,4	2,68	24,7	-0,19	6,65	4,392	26,4	35,68
S-3A	MW	1,002	2,559	2	2,16	40,1	-1,11	2,48	4,407	27,6	41,48
S-5B	HW	0,84	2,611	1,5	0,905	58,6	-2,18	5,88	4,2619	45,4	51,74

(WG:weathering grade; SGssd=specific gravity (saturated and surface dry) $I_{s(50)}$:point load index ($10,5 I_{s(50)dry} + 0,5 I_{s(50)sat}$) (Mpa), WA: percentage water absorption (%)
Ip:mikropetrographic index SST:MgSO4 soundness value (%); RDIs:static rock stability indicator, CD: micro-cracks plus voids ratio (%); k-value : cation packing index (10^{-2} mol/cm³), CLI:Chemical leaching Index; CWPI=Chemical Product Index)

Table 4. Index properties, and rock durability indices of rock materials from Harsit granitic rocks (Ceryan and Ceryan 2005, Ceryan et al 2008)

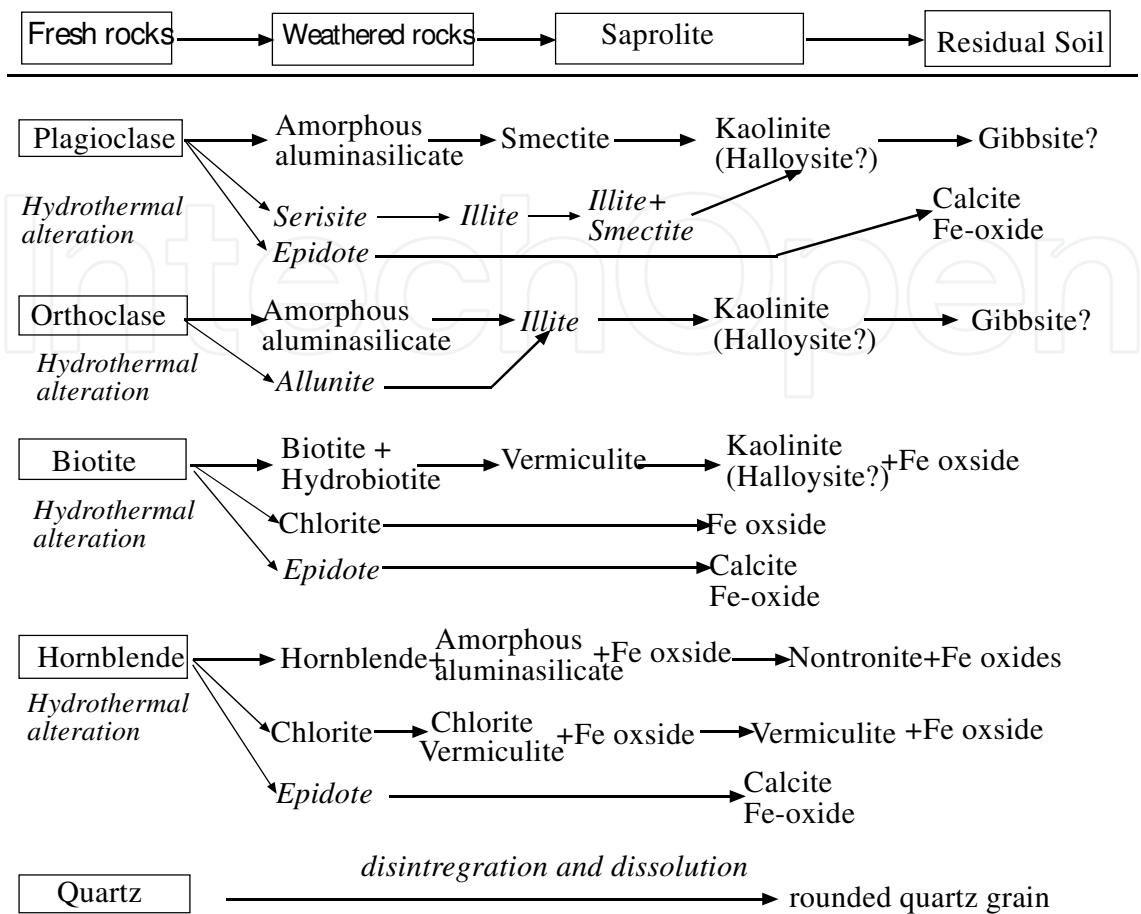


Fig. 7. Schematic representation of probable paths of rock-forming minerals transformation in the Harsit Granitoid

4.3 Classification of of Harsit Granitic Rocks for engineering purpose

Using petrographic techniques, the percentage of secondary minerals was established and relating this to the percentage microcracks and voids, a weathering classification from fresh to residual soils was established (Figure 8). While the engineering behaviors of the weathered rocks are assessed, the physical and mineralogical (directly chemical) changes caused by the weathering to be considered together will be significant (Table 5) The physical change is mainly in the direction of the ratio of effective porosity/total porosity increase and the ratio of micro-fracture + voids. Thus, this condition must be taken into consideration while the statistical relations between the weathering indices and the strength and deformation properties for weathered rocks. On the other hand, from the point of view of the geotechnical standpoint, indices based on the measurement of P-wave velocity generally have more applicability than those based on chemical, mineralogical and engineering properties (Ceryan et. al. 2008a). The classification of rock mass in the Harşit Granitoid is performed in accordance with the procedure suggested by Anon (1995) (Table 6). Transitions in the weathering zones of the Harsit Granitoid have graded. Because of changes even at the small scale, the same micro-region of the area in which exposed Harsit granitic rock masses in different weathering degrees (Figure 9).

Weathering Degree	Fresh	Slightly weathered	Moderately Weathered	Highly weathered	Completely weathered
Weathering Indices					
γ (g/cm ³)	2,664 (±0,042) (176)	2,634(±0,038) (99)	2,576(±0,053) (134)	2,553(±0,051) (87)	2,257 (±0,092) (127)
n (%)	1,92(±0,54) (176)	2,32(±0,59)(99)	4,43(±1,3)(134)	4,83(±1,6)(87)	15,32(±/3,7)(127)
ne (%)	1,50(±0,45)(176)	1,92(±0,55)(99)	3,74(±1,2)(134)	4,11(±1,4)(87)	14,08(±3,6)(127)
Sa (%)	0,57(±0,18)(176)	0,73(±0,21)(99)	(1,46)(±0,5)(134)	1,55(±0,64)(87)	6,31((±1,9)(127)
FMC (%)	89,6(±4,1)(24)	73,2(±4,9)(18)	58,4(±5,5)(21)	47,5(±5,7)(15)	38,6(±4,1)(33)
SMC(%)	10,1(±4,7)(24)	25,2(±4,73)(18)	36,9(±6,3)(21)	42,3(±4,3)(15)	47,43(±4,9)(33)
CD (%)	0,66(±0,4)(24)	1,61(±1,3)(18)	4,65 (±1,9)(21)	7,79(±2,43)(15)	14,9(±3,7)(33)
Irms(%)	11,54(±5,9)(24)	34,9(±9,6)(18)	64,43(±17,7)(21)	88,9(±15)(15)	128,1(±29,4)(33)
WPI	12,8(±0,48)(12)	7,2(±1,7)(9)	3,7(±1,6)(13)	-0,1(±2,4)(11)	-5,61(±4,1)(11)
P	74,9(±6,4)(12)	64,1(±3,3)(9)	59,4(±2,4)(13)	60,2(±6,4)(11)	46,8(±8,0)(11)
PI	84,5(±0,8)(12)	83,4(±0,8)(9)	82,2(±1,5)(13)	82,1(±0,9)(11)	81,7(±1,29)(11)
Imob	0,0 (12)	0,137(±0,01)(9)	0,126(±0,01)(13)	0,118(±0,02)(11)	0,096(±0,02)(11)
CWPI(%)	4,1(±0,5)(12)	22,5(±1,8)(9)	37,9(±4,8)(13)	54,1(±6,9)(11)	60,2(±7,3)(11)
I _{QAB} (%)	0,21(±0,07) (8)	0,41(±0,21)(7)	1,20(±0,23)(7)	1,80(±0,68)(6)	7,36(±1,63)(11)
Id (%)	99,3(±0,40)(8)	98,4(±1,03)(7)	88,8(±10)(7)	56,8(±13)(6)	7,62(±(5,7)(11)
I _{efp} (%)	23,5 (±11)(176)	19,6(±6,9)(99)	16,7(±5,2)(88)	13,6(±6,1)(25)	13,2(±3,2)(66)
V _p (m/sn)	4111(±198)(176)	3553(±396)(99)	2769(±553)(134)	2158(±486)(87)	753(±184)(127)
V _{pm} (m/sn)	5732(±127)(176)	5109(±342)(99)	4507(±555)(134)	4079(±280)(87)	3617(±231)(127)
IQ(%)	75,6(±7,4)(176)	69,8(±7,2)(99)	59,7(±6,8)(134)	42,2(±14)(87)	20,0(±8,9)(127)
I _{vp} (%)	96,8(±1,8)(176)	83,0(±11,7)(134)	74,8(±6,8)(134)	65,6(±4,5)(87)	60,1(±0,06)(127)
PWD	0,5(±0,4)(12)	2,80(±1,9)(9)	10,4(±3,3)(13)	17,5(±13,7)(11)	17,5(±13,7)(11)
CWD	0,3 (±0,1)(1760)	10,2(±3,9)(99)	18,2(±5,9)(134)	27,3(±6,7)(87)	27,3(±6,7)(87)
Mechanical Properties					
I _{s(50)} , MPa	7,3 (±1,8) (96)	5,0(±1,6)(68)	1,9(±0,9)(88)	1,0(±0,7)(61)	-
σ_c (MPa)	160,3(±34)(40)	128,9(±42)(37)	66,8(±33)(39)	39,3(±30)(27)	2,2(±1)(61)
σ_t (MPa	13,2(±1,4)(25)	8,4(±2,2)(20)	3,0(±1,8)(30)	1,8(±1,4)(14	-
Ed x10 ⁴ (MPa)	4,575(±0,5)(176)	3,407(±0,7)(134)	2,089(±0,8)(134)	1,269(±0,5)(87)	0,14(±0,06)(127)
Et x10 ⁴ (MPa)	5,483(±0,5)(8)	2,085(±0,4)(9)	0,869(±0,3)(15)	0,491(±0,17)(5)	-
Es x10 ⁴ (MPa	1,967(±0,48)(8)	1,499(±0,47)(9)	0,607(±0,26)(15)	0,355(±0,16)(5)	-

(γ (g/cm³): Dry density; n (%);Total prosity, ne (%)Effective porosity,, Sa (%) Water absorbtion, (atmospheric pressure); V_p: P-wave veloccity in dry samples; V_{pm}: : P-wave veloccity in solid part of the sample, I_{QAB} (%) Quick absorbsiyon, Id(%)Slake durability (second cycle), SHV: Schmidt rebound hardness ; I_{s(50)} (MPa) Point load strength index , σ_c (MPa Unconfined compressive strength , σ_t (MPa) Indirect (Brazilian) tensile strength; Ed (MPa): Dynamic Elastisite modulu; Et (MPa) Tanjant Elastisite modulu, Es (MPa):Deformasyon Modulu, (N-type Schmid hammer is used),FMC: fresh mineral)

Table 5. Average (± standard deviation) and (number of data) weathering indices and Mechanical properties of each weathering grade defined for granitic materials from Harsit Granotoid (Ceryan et. al. 2008a)

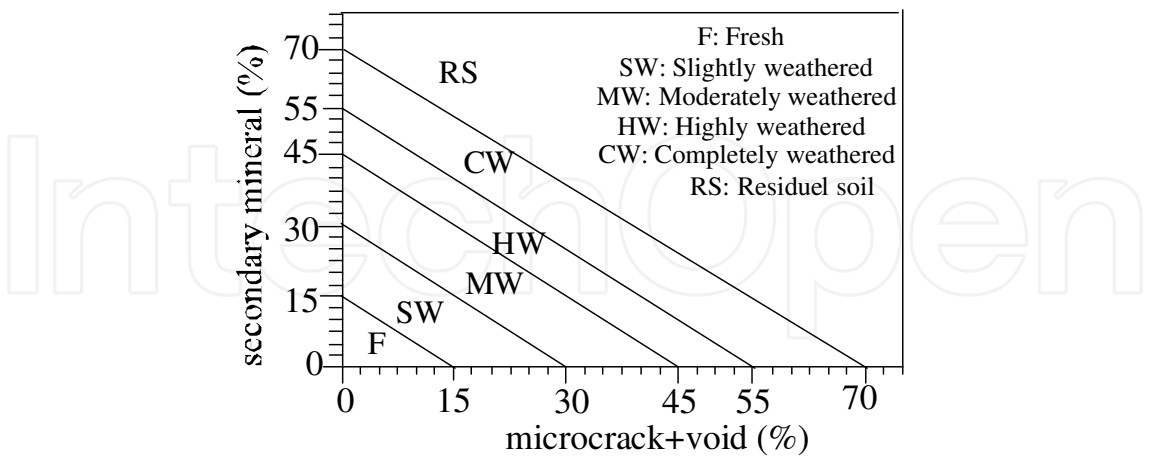


Fig. 8. The definition of the rock material weathering grade for Harsit Granitic Rocks

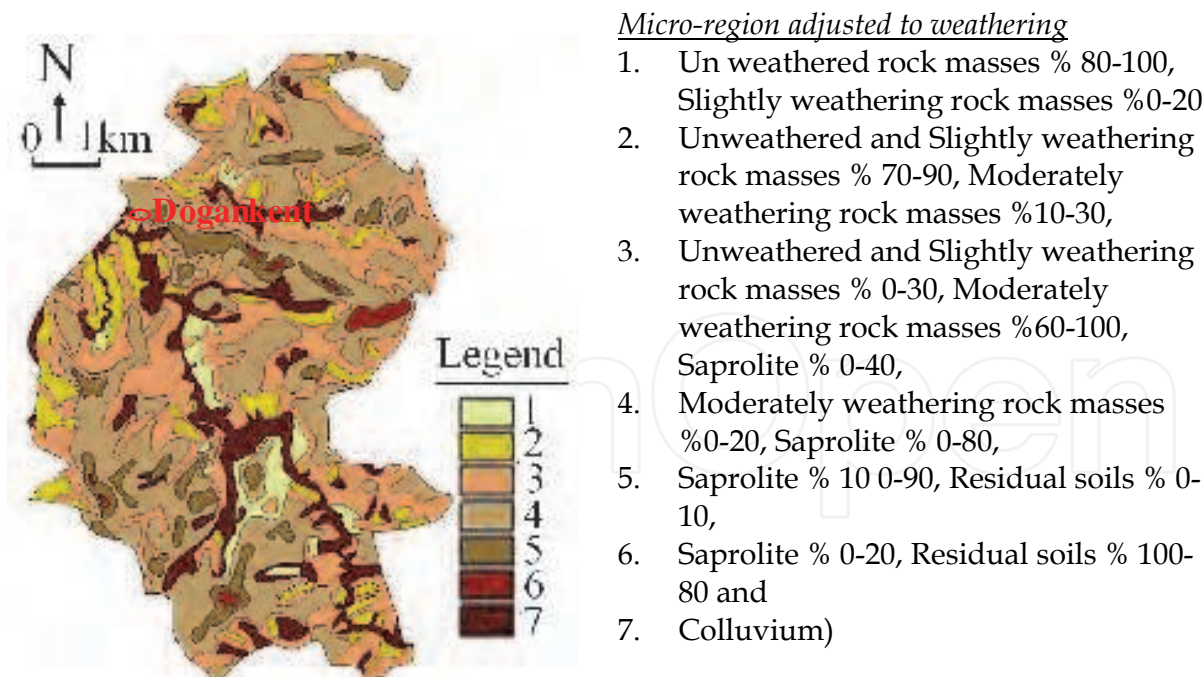






Fig. 9. Micro-region adjusted to weathering in urban area of Dogankent (NE Turkey (Ceryan and Ceryan (2008)

Zon	Weathering Profile	Description and typical characteristics
6		<i>Material:</i> % 100 RS-CW It is separated material including more sand, clay and silt. $c=0.1-0.2$ MPa, $\phi=36-40^{\circ}$. <i>Mass structure</i> : Mass structure isn't preserved. The thickness varies between 0.5 and 5m.
5		<i>Material:</i> $>\%30$ F-MW, $>\%70$ HW-RS. The dispersion of the material is generally in order and the zone is homogeneous $\phi=38-42^{\circ}$, $c=0.2-0.3$ MPa. <i>Discontinuities:</i> Systematic discontinuities and the fractures formed with weathering are preserved. Filling of the discontinuities usually consists of clay and iron oxide. $\phi_b=22-16^{\circ}$, JRC=2-6, Discontinuity frequency (Df) = $142.4(\pm 1.5)$ (discontinuity length/ m^2). <i>Rock mass structure:</i> May behave as soil although relict fabric may be significant. Weak grade will control behavior of soil mass. For rock mass with relict structure $\phi_m=18-20$, $c_m=0.06-0.04$ MPa The thickness varies between 2.5 and 11 meter.
4		<i>Material:</i> % 30-50 F-MW, % 50-70 HW-CW. <i>Discontinuities:</i> The thickness of the filling become lager amount. The filling generally consists of silt and sand. Rock bridge is completely removed. There are plenty of fractures formed by weathering in the corestones. $\phi_b=26-18^{\circ}$, JRC=2-4(± 2), JCS=23(± 12) MPa, Discontinuity frequency (Df)=11.6(± 2.1) <i>Rock mass structure:</i> Corestones are beginning breaking and may be significant for investigation and construction Rock framework still locked and controls strength and stiffness, matrix control permeability. $\phi_m=21-24$, $c_m=1.3-1.8$ MPa The thickness varies 2.5 and 11 meter.
3		<i>Material:</i> % 50-90 G: I-III % 10-50 G: IV- VI. <i>Discontinuities:</i> Weathering deepness is usually bigger than the roughness. The fractures formed by weathering are seen in the blocs. The number of rock bridges gets less. Spacing of the discontinuities is more less than first zone. $\phi_b=32-25^{\circ}$, JRC=4-8(± 2), JCS=53(± 14) MPa, Df=2.4(± 1.3) <i>Rock mass structure:</i> The edge of the corestones becomes circular. Mass structure is preserved. But the blocks tend to divide each other. Rock framework still locked and controls strength and stiffness, matrix control permeability. $\phi_m=22-25$, $c_m=1.8-2.4$ MPa The thickness varies 1.5 and 6 m.



2		<i>Material:</i> >%9U F-MW, <%10 HW-CW.. <i>Discontinuities:</i> Weak materials along discontinuities. Shear strength stiffness and permeability affected. $\phi_b = 28-26^\circ$, $JRC=6-10(\pm 4)$, $JCS=112(\pm 21)$ MPa, $D_f=2.4(\pm 1.3)$. <i>Rock mass structure :</i> The blocks are cornered and interconnect each other.For closely jointed rock masses $\phi_m = 26-28^\circ$, $c_m=2.3-4.4$ MPa. The thickness varies 3 and 40 meter.
1		<i>Material:</i> %100 F-MW. <i>Discontinuities:</i> Discolour on discontinuities surface. $\phi_b = 21-18^\circ$, $JRC=8-12(\pm 2)$, $JCS=160(\pm 34)$ MPa $D_f=1.6(\pm 0.3)$. <i>Rock mass structure :</i> The blocs are interconnect firmly each other Properties of deformation and strength depend on direction and properties of the discontinuities. Behaves as rock apply rock mechanics principles to mass assessment and design

Table 6. The weathering classification of rock mass of Harsit granitic rocks (Ceryan and Ceryan 2008)

5. References

Akgun, A. And Ceryan, Ş. 2010.Estimating of the Mechanical Properties of Rock Masses by the Rating System Representing Rock Mass Weathering: A Case Study”, 9th International Congress on Advances in Civil Engineering, 27-30 September 2010 Karadeniz Technical University, Trabzon, Turkey, p.1-6, 2010

Al-Qudami, Shehata WM, Al-Harthi AA, Sabtan A. 1997. On weathering of syenite under arid conditions. *Bulletin of the International Association of Engineering Geology*, 56, 3-8

Anon 1995, The description and classification of weathered for engineering purposes (Geological Society Engineering Group Working, Party Report). *Quarterly Journal of Engineering Geology*, 28, 207-242

Arıkan, F, Ulusay, R. And Aydın N. 2007. Characterization of weathered acidic volcanic rocks and a weathering classification based on a rating System . *Bulletin of Engineering Geology and the Environment* 66,415–430

Aydın, A. and Basu A. 2006. Technical Note :The use of Brazilian Test as a Quantitative Measure of Rock Weathering. *Rock Mech. Rock Engng.* 39 (1), 77–85 83

Banfield, J. F. 1985, *The Mineralogy and Chemistry of Granite Weathering*, Master of Science Thesis. Australian National University.

Basu, A., Celestino, T. B. and Bortolucci, A. A. 2009. Evaluation of rock mechanical behaviors under uniaxial compression with reference to assessed weathering grades. *Rock Mech Rock Engng*, 42: 73–93

Bozkurtoğlu, E., Vardar, M., Suner, F., and Zambak C. 2006. A new numerical approach to eathering and alteration in rock using a pilot area in the Tuzla geothermal area, Turkey. *Engineering Geology*, 87, 33–47

- British Standards Institution (BSI), 1981. Code of Practice for Site Investigations. London, 147.
- Ceryan, Ş. 2011. Estimating of the Durability and Weathering State of Rock Materials Using Chemical Weathering Indices based on Cation Packing Value: A Case Study, *Proceeding of 11th International Multidisciplinary Scientific Geoconferance 20-25 June 2011, SGEM 2011, Bulgaria, Volume I*, 437-444
- Ceryan, S. 1999. *Weathering and Classification of Harsit Granitoid and the Effect of Weathering on Engineering Properties*. Ph.D. Thesis. Karadeniz Technical. University, Trabzon, Turkey, 300p, (in Turkish)
- Ceryan, Ş. 2008. New Chemical Weathering Indices for Estimating Engineering Properties of Rocks: A Case Study from Kürtün Granodiorite, NE Turkey, *Turkish Journal of Earth Sciences*, 17, 187-207
- Ceryan, Ş. and Ceryan, N. 2005. The relationship between the chemical weathering indices and potential durability of stone in service. *Proceeding of 1st International Symposium on Travertine, September 21-25, Pamukkale University, Denizli, Turkey*, 291-296
- Ceryan, Ş., Ceryan N. and Aydın, A. 2005. Determination of Weathering In Engineering Time Using Interaction Matrices. *Proc. of 1st International Symposium on Travertine, September 21-25, Pamukkale University, Denizli, Turkey*, 297-304, 2005.
- Ceryan, N. and Ceryan, S. 2008. An application of interaction matrice method for slope failure susceptibility zoning: Dogankent settlement area (Giresun, NE Turkey). *Bulletin of Engineering Geology and Environment*, 67,375-385
- Ceryan, S. and Sen, C.2003. Two Potential Methods: Chemical Weathering Index and Elastic Wave Velocity Defining Potential Rock Durability *Proceeding of industrial minerals and building stones. International Association for Engineering Geology and Environment The Turkish National Group of IAEG, İstanbul, Turkey*, 139-146
- Ceryan, S., Tudes., S. and Ceryan, N. 2008a. Influence of weathering on the engineering properties of Harsit granitic rocks (NE Turkey)", *Bulletin of Engineering Geology and Environment*, 67, 97-10
- Ceryan, S., Tudes, S. and Ceryan, N. 2008b. A new quantitative weathering classification for igneous rocks. *Environmental Geology*, 55, 1319-1336, 2008
- Ceryan, S., Zorlu K., Gökçeoğlu, C. and Temel, A. 2008c. The use of cation packing index for characterizing the weathering degree of granitic rocks. *Engineering Geology*, 98, 2008, 60-74
- Ceryan, Ş., Ceryan, N. and Bostancı, H. T. 2008d. An example for the prediction of the rock durability using fuzzy model. *Proceedings of the 8th International Congress on Advances in Civil Engineering, ACE 2008, Famagusta, North Cyprus, 15-17, 2008, September, Vol 3: Engineering Materials/Structural& Earthquake Engineering*, 41,50
- Chesworth, W. Dejou, J. and Larroque, P. 1981. The weathering of basalt and relative mobilities of the major elements at Belbex. France, *Geochimica et Cosmochimica Acta* 45, 7, 1235-1243.
- Cole, W.F and Sandy M.J. 1980. A Proposed Secondary Mineral Rating for Basalt Road Aggregate Durability. *Australian Road Research*, 10(3), 27-3
- Colman, S.M. 1982. Chemical Weathering of Basalts and Andesites: Evidence from Weathering Rinds, U.S. Geological Survey Professional Paper No:1246, 51p.

- Conca, J.L. and Cubba, R. 1986. Abrasion resistance hardness testing of rock materials. *Int J Rock Mech Min Sci Geomech Abstr* 23(2),141-149
- Davis G.H. 1984. *Structural Geology of Rocks and Regions*. John Wiley and Sons, New York
- Dearman W.R. and Irfan T.Y. 1978. Assessment of The Degree of Weathering in Granite Using Petrographic And Physical Index Tests. *International Symposium on Deterioration and Protection of Stone Monuments*, Unesco, Paris, 2.3,3-35
- Dearman W.R., Turk, N, Irfan T.Y. and Rowshane, H. 1987. Detection of rock material variation by sonic velocity zoning. *Bulletin of the International Association of Engineering Geology*, 35, 3-8
- Dearman, W. R. 1976. Weathering Classification in the Characterization of Rock: A Revision *Bulletin of the International Association of Engineering Geology*, 13, 123-127.
- Dixon, H.W. 1969. Decomposition products of rock substances. Purposed engineering geological classification. *Rock Mechanics Symp.* Stephen Roberts Theatre, Univ. Sydney, 39-44
- Dobereiner, L, Durville, J.L. and Restituto, J. 1993. Weathering of the Massiac Gneiss (Massif Central, France). *Bulletin of the International Association of Engineering Geology*, 47,79-97
- Düzgören-Aydin, N.S. and Aydin A. 2003. Chemical heterogeneities of weathered ignous profiles: implications for chemical indices. *Environmental and Engineering Geoscience* 9, 4, 363-376.
- Düzgören-Aydin, N.S., Aydin A. and Malpas, J. 2002. Re-assessment of chemical weathering indices: case study of pyroclastic rocks of Hong Kong. *Engineering Geology* 63, 99-119.
- Erguler Z.A., and Ulusay, R. 2009. Assessment of physical disintegration characteristics of clay-bearing rocks: Disintegration index test and a new durability classification chart. *Engineering Geology*, 105(1-2), 11-19
- Esaki, T and Jiang, K. 1999. Comprehensive study the weathered condition of welded tuff from a historic stone bridge in Kagoshima, Japan, *Engineering Geology* 55, 121-130.
- Eynatten, H., Barcelo/-Vidal, C. and Pawlowsky-Glahn. 2003. Modelling Compositional Change: the Example of Chamical Weathering of Granitoid Rocks. *Mathematical Geology*, 35 (3), 211-251
- Fookes, P.G., Gourley, C. S. and Ohikere, C. 1988. Rock weathering in engineering time. *Quarterly Journal of Engineering Geology* 21, 33-57
- Fourmaintraux, D. 1976. Characterization of rocks; laboratory tests, Chapter IV in *La Mecanique des roches appliquee aux ouvrages du genie civil* by Marc Panet et all. Ecole Nationale des Ponts et Chaussees. Paris.
- Franklin JA, Chandra R (1972) The slake durability test. *Int JRock Mech Min Sci* 9,325-341
- GCO, 1994. *Guide to Rock and Soil Descriptions*. *Geoguide 3*, 2nd edition, Geotechnical Engineering Office Hong Kong.
- Gokceoglu C., Zorlu ,K., Ceryan, S. and Nefeslioglu, H. A. 2009. comparative study on indirect determination of degree of eathering of granites from some physical and strength parameters by two soft computing techniques., *Mateials Characteization*, 60 1317-1327,
- Gokceoglu, C. and Aksoy ,H . 2000. New approaches to the characterization of clay-bearing, densely jointed and weak rock masses. *Engineering Geology*, 58 1-23.


- Gokceoglu, C., 1997. *The approaches to overcome the difficulties encountered in the engineering classification of clay-bearing, densely jointed and weak rock masses*. PhD Thesis, Hacettepe University, Geological Engineering Department (in Turkish).
- Grant, J.A. 1986. The isocron diagrams-a simple solution the Gresens equations for metasomatic alterations. *Economic Geology* 87, 1976-1982.
- Gresens, R. L. 1967. Composition-volume relationships of metasomatism, *Chemical Geology*, 2, 47-65.
- Guan, P., Ng, C.W.W. Sun, M. and Tang W. 2001. Weathering indices for rhyolitic tuff and granite in Hong Kong, *Engineering Geology* 59, 147-159.
- Gulec, K. 1973. *Engineering geology of Afyon Marbles and the relationships between its physico-mechanical properties and weathering*. . Ph.D. Thesis İstanbul Technical. University, İstanbul, Turkey, (in Turkish).
- Guolin R, Yushan L (1990). Engineering geological zonation of Xiamen granitic weathered crust and bearing capacity of residual soil. 6th International IAEG Congress, 1989-1996, Balkema Rotterdam.
- Gupta. A.S. and Rao K.S. 2001. Weathering indices and their applicability for crystalline rocks. *Bulletin of Engineering Geology and the Environment*.,60, 201-221
- Gurocak Z, Kilic, R. 2005. Effect of weathering on the geomechanical properties of the Miocene basalts in Malatya, Eastern Turkey, *Bulletin of Engineering Geology and the Environment*, 64, 373-381
- Hamrol, A. 1961. A quantitative classification of weathering and weatherability of rocks. *Proc.5th. Int. Conf. Soil Mechanics. Foundation Engineering*, Paris, 2, 771-773
- Howarth, D.F. and Rowlands, J.C., 1987. Quantitative Assesment of Rock Texture and Correlation with Drillability and Strength Properties. *Rock Mechanics and Rock Engineering*, 20, 57-85.
- Huston, D.L. 1993. The effect alteration and metamorphism on wall rocks to the Balcooma and Dry River South volcanic-hosted massive sulfide deposits, Queensland, Australia. *Journal of Geochemical Exploration* 48, 277-307.
- Illev, I.G. 1967. An attempt to estimate the degree of weathering of intrusive rocks from their physico-mechanical properties. *Proc. 1 st. Cong. Int. Soc. Rock Mechanics.*, Lisbon, 109-114
- Irfan TY (1996). Mineralogy, fabric properties and classification of weathered granites in Hong Kong. *Quarterly Journal of Engineering Geology*, 1996, 29,5-35
- Irfan, T.Y. and Dearman, W.R. 1978a The engineering petrography of a weathered granite in Cornwall, England. *Quarterly Journal of Engineering Geology*, 11,233-244
- Irfan, T.Y. and Dearman, W.R. 1978b. Engineering classificational and index properties of a weathered granite, *Bull. Int. Assoc.Engng Geol*, 32, 67-80.
- Irfan, T.Y. and Powell, G.E. 1985. Engineering geological investigations for pile foundation on a deeply weathered granitic rock in Hong Kong. *Bull Int Assoc Eng Geol* 32:67-80
- Jayawardena U. de S. and Izawa, E., 1994a. Application of present indices of chemical waethering for precambrian metamorphic rocks in Sri Lanka. *Bulletin of the Intertanional Association of Engineering Geology* 49, 55-61.
- Jayawardena U. de S. and Izawa, E. 1994b. A new chemical index of weathering for metamorphic silicate rocks in tropical regions: A study from Sri Lanka, *Engineering Geology* 36, 303-310.

- Kilic, R. 1995. Geomechanical properties of the ophiolites (Çankırı, TURKEY) and alteration degree of diabase *Bulletin of the International Association of Engineering Geology*, 51, 63-69
- Kilic, R. 1999. A unified alteration index(UAI) for mafic rocks. *Environmental and Engineering Geoscience*, 4, 475-483
- Kocbay, A. 2003. *Investigation of characteristics and alteration degree of basalts outcropped in the vicinity of Osmancik-Corum*, Ph.D. Thesis Ankara University, Ankara, Turkey, 46p. (in Turkish)
- Koncagul, E.C. and Santi, P.M. 1999. Predicting the unconfined compressive strength of the Breathitt shale using slake durability, Shore hardness and rock structural properties. *Int J Rock Mech Min* 36(2),139-153
- Korkmaz N. and Ceryan N. 2011. An Example for The Prediction of the Uniaxial Compressive Strength of Weathered Rocks Using The Wethering Indices based on P-Wave Velocity. *Proceeding of 11th International Multidsiplinary Sceintific Geoconferance* 20-25 June 2011, SGEM 2011, Bulgaria, Volume I,347-354
- Krank, A.K.D. and Watters, R.J. 1983. Geotechnical properties of weathered Sierra Nevada granodiorite. *Bull. Association. Engineering. Geol.*, 20,173-184
- Krauskopf, K.B., 1967. *Introduction to Geochemistry*. McGraw-Hill Book Company Inc., 176,1967, 518-527.
- Lan, H.X., Hu, R.L., Yue, Z.Q. Lee, C.F. and Wang, S.J. 2003. Engineering and geological characteristics of granite weathering profiles in South China. *Journal of Asian Earth Science* 21, 353-364.
- Lee, S.G. 1987. *Weathering and geotechnical characterization of Korean granites*, PhD Thesis, Imperial College, University of London.
- Loughnan, F. C. 1969. *Chemical Weathering of the Silicate Minerals*, Elsevier, Amsterdam.
- Lumb, P., 1983. Engineering properties of fresh and decomposed igneous rock from Hong Kong. *Engineering Geology* 19, 81- 94.
- Lump, P. 1962. The properties decomposed granite. *Geotechnique*, 12, 226-243
- Maclean, W. H. 1990. Mass change calculations in altered rock series. *Mineraliu Deposita* 25, 44-49.
- Marques, E.A.G., Barroso E.V., Menezes Filho A.P. and Vargas Jr. E. do A. 2010. Weathering zones on metamorphic rocks from Rio de Janeiro—Physical, mineralogical and geomechanical characterization, *Engineering Geology*, 111 (1-4), 1-18
- Martin, R.. 1986. Use Of Index Tests For Engineering Assessment Of Weathered Rocks. *Proceedings of 5 th Congress of International Association of Engineering Geologists*, Buenos Aires, 433-450.
- Martin, R., P. and Hencher, S., R., 1986, Principles For Description And Classification Of Weathered Rocks For Engineering Purposes. In: Hawkins, A., B. (ed.), *Site Investigation Practice*, Geological Society, London, Engineering Geology Special Publication, 2, 299-308.
- Mendes, F.M., Aires-Barros L and Rodriques, F.P. 1967. The use of modal analysis in the mechanical characterization of Rock Masses. *Proc. 1 st. Int. Congress, In. Soc. Roc. Mech.*, Lizbon, 1, 217-233
- Minarik, L., Absolon, K., Köllnerova, Z. and Klecka, M. 1983. Chemical change of granite during its weathering, *In: Leaching and diffusion in rocks and their weathering products*. Augustithis, S. S., (ed), Theophrastus Publications. S.A. Athens, 293-306.

- Moon V.G. and Beattie, A.G. 1995. Textural and microstructural influences on the durability of Waikato Coal Measures mudrocks. *Quarterly Journal of Engineering Geology* 28, 303-312
- Ohta, T. and Arai, H. 2007. Statistical empirical index of chemical weathering in igneous rocks: A new tool for evaluating the degree of weathering. *Chemical Geology* 240, 280-297
- Ollier, C. 1984. *Weathering Geomorphology Text*. 2nd edition, Longman, London.
- Onodera, T.F., Yoshinaka, R. and Oda, M. 1974. Weathering and its relation to mechanical properties of granite. Third International Conference of ISRM, Denver 2A, 71--78.
- Pasamehmetoglu, A.G., Karpuz C. and Irfan, T.Y. 1981. The weathering classification of Ankara andesites form rock mechanics point of view, *Proc. Int. Symp. Weak Rocks, Tokyo* Vol.1, 185-190
- Price, D. G. 1995. Weathering and Weathering Processes. *Quarterly Journal of Engineering Geology* ,28, 34-252.
- Price, J. R. and Velbel, M. A. 2003. Chemical weathering indices applied to weathering profiles developed on heterogeneous felsic metamorphic parent rocks. *Chemical Geology* 202, 397-416.
- Rigopoulos, I., Tsikouras, B., Pomonis, P. and Hatzipanagiotou, K. 2010. The influence of alteration on the engineering properties of dolerites: The examples from the Pindos and Vourinos ophiolites (northern Greece). *International Journal of Rock Mechanics & Mining Sciences* 47, 69-80
- Sadisun, I.A., Shimada, H., Ichinose M. and Matsui, K. 2005. Study on the physical disintegration characteristics of Subang claystone subjected to a modified slaking index test, *Geotechnical and Geological Engineering* 23, 199-218
- Shalkowski, A. Yoshinori Kodama, Y. and Nakano, S. 2009. The assessment of weathering stages in granites using an EC/pH meter. *Geomorphology* 105, 253-260
- Sousa, L. M. O., Suarez del Rio L.M, Calleja L., Vicente, G., Argandofia V.G R and Rey A. R. 2005. Influence of microfractures and porosity on the physico-mechanical properties and weathering of ornamental granites. *Engineering Geology* 77, 2005, 153-168
- Tecer L. 1999. Laboratory Experiments on the Investigation of the effects of Sulphuric Acid on the Deterioration of Carbonate Stones and Surface corrosion. *Water, Air, and Soil Pollution*, 114, 1-12.
- Tecer L and Cerit O. 2002. The Effects Of Air Pollution On Carbonate Stone Monuments In Urban Areas (Sivas, Turkey), *Fresenius Environmental Bulletin*, 11:8, 505-509.
- Tuğrul, A and Gurbinar, O. 1997. The effect of chemical weathering on the engineering properties of Eocene basalts in northeastern Turkey. *Environmental & Engineering Geoscience* 3, 225-234.
- Turk, N. and Dearman, W.R. 1985. Influence of water on engineering properties of weathered rocks. *Proc. 21st Raq. Conf., Engng. Group of the Geol. Soc. On Groundwater in Engineering Geology*, Sheffield, UK. 109-121
- Vogel, D. E. 1973. Precambrian Weathering in Acid Metavolcanic Rocks from The Superior Province, Villebond Township, Southcentral Quebec., *Canadian Journal Earth Science*, 12, 2080-2085.

- Wei K. and Liu D. 1990. The zoning system for assessment of weathering states of granites, *Proceedings 6th Int. IAEG Congress, Amsterdam*, 657–663.
- Weinert, H.H. 1964. Engineering petrology for roads in South Africa. *Engineering Geology*, 2, 363-395
- Weiss, T., Rasolofosaon. P. N. J. and Siegesmund, S. 2002. Ultrasonic wave velocities as a diagnostic tool for the quality assessment of marble. *Natural Stone, Weathering Phenomena, Conservation Strategies and Case Studies* (edited by. Siegesmund S, Weiss T. and Vollbrecht A) Geological Society, London, Special Publications. 205, 2002, 149-164
- Yıldız A., Kuşcu, M., Dumlupınar, İ., Arıtan, A. E. And and Bağcı, M. 2010. The determination of the mineralogical alteration index and the investigation of the efficiency of the hydrothermal alteration on physico-mechanical properties in volcanic rocks from Köprülü, Afyonkarahisar, West Turkey. *Bulletin of Engineering Geology and the Environment*, 69(1), 51-61,
- Zhao, J and Broms B.B. 1993. Mechanical and physical properties of weathered Bukit Timah granite of Singapore. *Geotechnical Engineering of Hard Soils-Soft Rocks*, Anagnostopoulos et. all (eds). Balkema, Rotterdam, 883-890.

IntechOpen

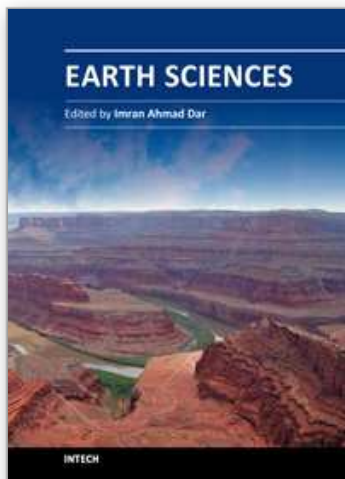

Earth Sciences

Edited by Dr. Imran Ahmad Dar

ISBN 978-953-307-861-8

Hard cover, 648 pages

Publisher InTech

Published online 03, February, 2012

Published in print edition February, 2012

The studies of Earth's history and of the physical and chemical properties of the substances that make up our planet, are of great significance to our understanding both of its past and its future. The geological and other environmental processes on Earth and the composition of the planet are of vital importance in locating and harnessing its resources. This book is primarily written for research scholars, geologists, civil engineers, mining engineers, and environmentalists. Hopefully the text will be used by students, and it will continue to be of value to them throughout their subsequent professional and research careers. This does not mean to infer that the book was written solely or mainly with the student in mind. Indeed from the point of view of the researcher in Earth and Environmental Science it could be argued that this text contains more detail than he will require in his initial studies or research.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Sener Ceryan (2012). Weathering Indices for Assessment of Weathering Effect and Classification of Weathered Rocks: A Case Study from NE Turkey, Earth Sciences, Dr. Imran Ahmad Dar (Ed.), ISBN: 978-953-307-861-8, InTech, Available from: <http://www.intechopen.com/books/earth-sciences/weathering-indices-for-assessment-of-weathering-effect-and-classification-of-weathered-rocks-a-case->

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2012 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](https://creativecommons.org/licenses/by/3.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

IntechOpen

IntechOpen